


Coupling R500 for angular application until 90°

For ROTRANS 04, 08, 12 and ROTRANS 18, 24, 30

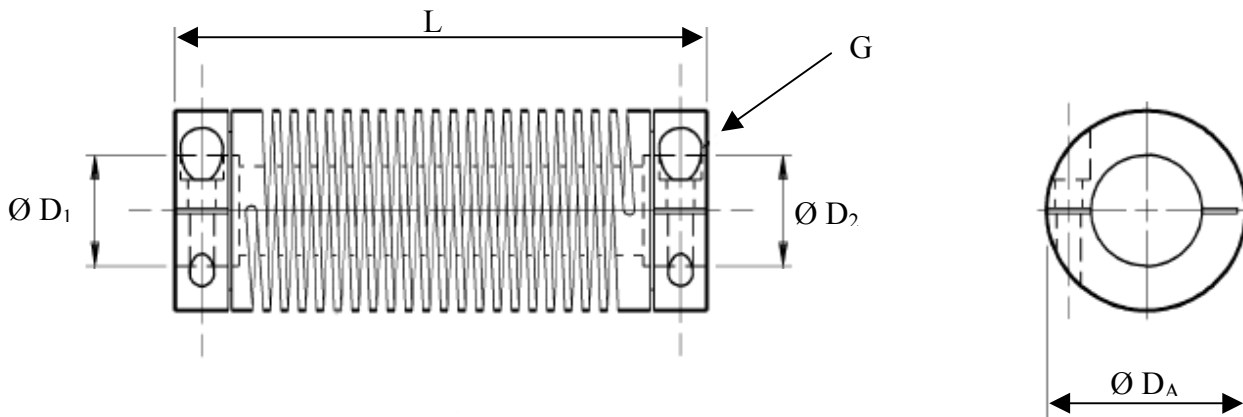

	R500
Speed	3'000 rpm (higher: contact us)
Axial displacement	± 3
Angle 90° (higher : contact us)	2'000 rpm
L	76.2
Ø D _A	28.6
G	Fixing screws furnished
Ø D ₁ - Ø D ₂ H7	12 - 17
Temperature	-30° to +120°C (∧ +150°C)

Special machined
&
Special balanced
For ROTRANS

The ROTRANS cable lifetime will be reduce according the angle and the rotational speed. It could be recommended to add a foam as protection between cable and inside diameter of the coupling

Ordering information

Type	Description	PN	
Coupling R500 Standard	Flexible coupling for RORANS 04 - 30 until angle of 90° Standard	200-500-12-15	-12 = Ø D1 -15 = Ø D2
Coupling R500	Flexible coupling for RORANS 04 - 30 until angle of 90°	200-500-XX-YY	XX = Ø D1 YY = Ø D1
Coupling R500S	Flexible coupling for RORANS For other dimension, angle, speed etc	200-500-S	On request

Delivery time : 8 working weeks after receipt order



Due to the continual development of our products, the specification may be modified without forewarning.